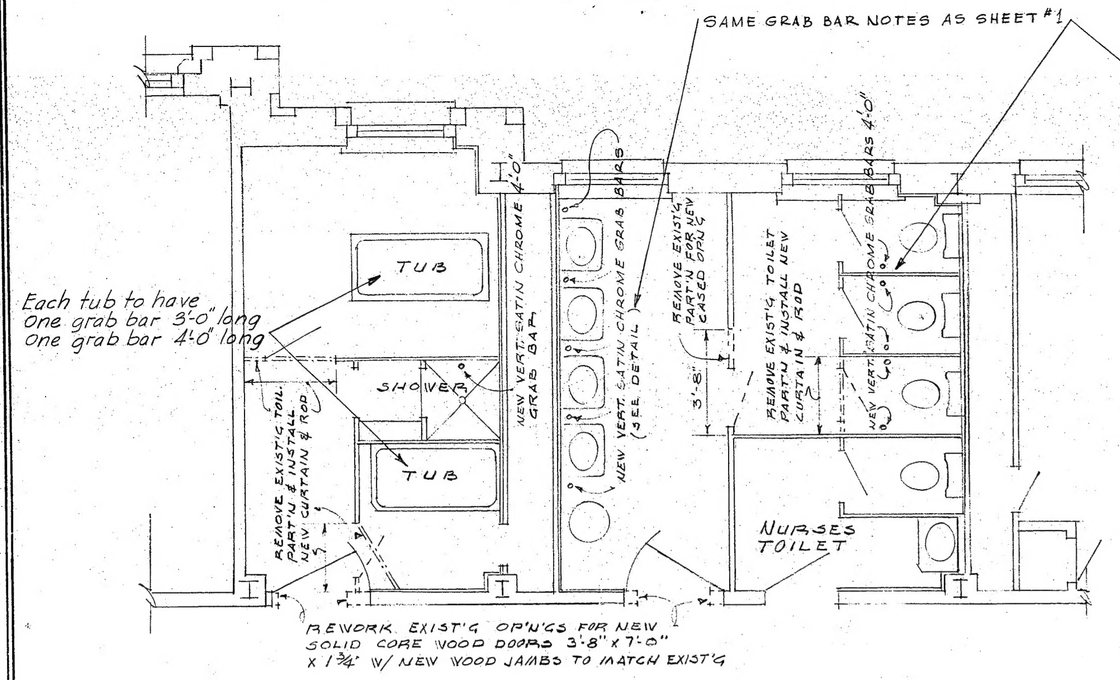
SAME GRAB BAR NOTES AS SHEET #1
Each tub to have One grab bar 3'-0" long One grab bar 4'-0" long
TUB
SHOWER
TUB
NEW VERT. SATIN CHROME GRAB BAR
NEW VERT. SATIN CHROME GRAB BARS
REMOVE EXIST'G TOILET PARTITION & CASED OPG'S
REMOVE EXIST'G TOILET PARTITION & ROD
NEW VERT. SATIN CHROME GRAB BARS
REMOVE EXIST'G TOILET PARTITION & ROD NEW CURTAIN & ROD
NURSES TOILET
REWORK EXIST'G OPG'S FOR NEW SOLID CORE WOOD DOORS 3'-8" x 7'-0" x 1¾" W/ NEW WOOD JAMBS TO MATCH EXIST'G

DETAIL 11-B

TYPICAL TOILET ROOM PLAN AT SECOND, THIRD, & FOURTH FLOORS. RMS - 229, 230, 231, 232, 328, 329, 330, 331, 426, 427, 428 & 429.

SCALE 1/4" = 1'-0"

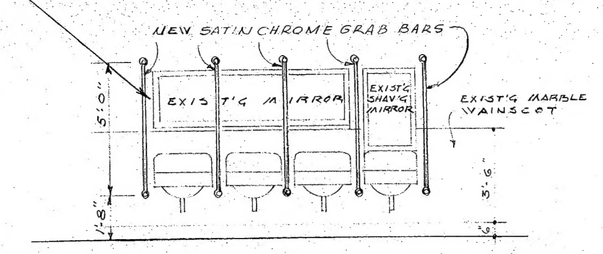

TYPICAL LAVATORY ELEVATION SHOWING NEW 5'-0" SATIN CHROME GRAB BARS

SCALE 1/4" = 1'-0"

THIS ELEVATION IS FOR DETAILS 11-A & 11-B

Note

Grab bars as shown shall also be required for rooms 213, 214, 216 217, 244, 246, 247, 248, 311, 312, 314, 315, 344, 346, 347, 348, 410, 411, 413, 414, 441, 442, 444, 445, 506, & 508

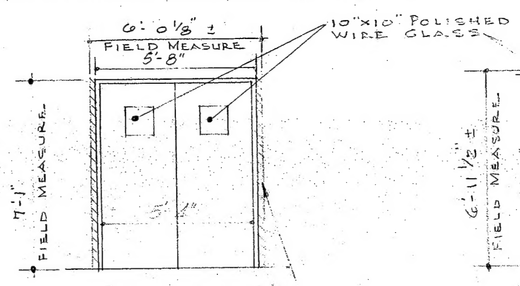

DETAIL # 3

SEE LOCATION SHEET NO. 1

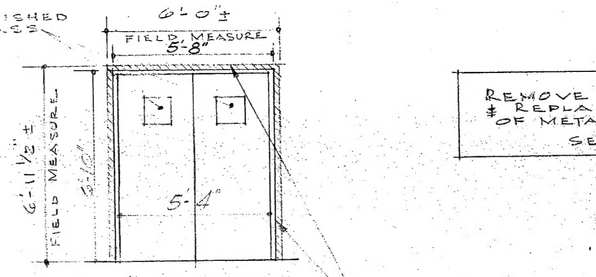

DETAIL # 7

SEE LOCATION THIS SHEET

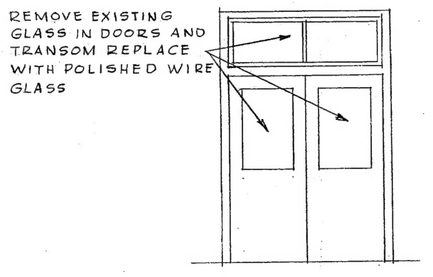

DETAIL # 6

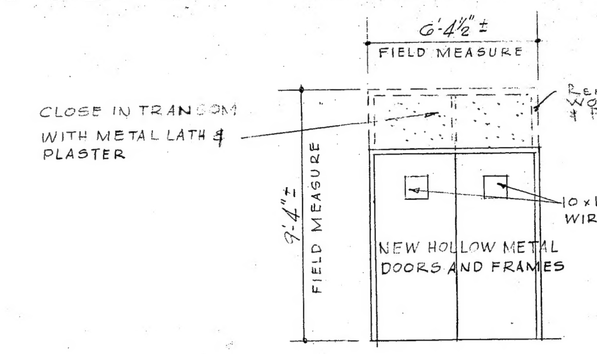
CLOSE IN TRANSOM WITH METAL LATH & PLASTER
6'-4" ± FIELD MEASURE
REMOVE EXIST. WOOD DOORS & FRAME
10 x 10 POLISHED WIRE GLASS
7'-4" FIELD MEASURE
NEW HOLLOW METAL DOORS AND FRAMES
ELEVATION 1/4" = 1'-0"

DETAIL # 5

REMOVE ROLLING METAL DOOR & REPLACE WITH NEW PAIR OF METAL DOORS & FRAMES SEE DETAIL #7

Remove existing glass and replace with polished wire glass See Detail #6

Paint existing wood partitions and wood shelves in storage room # 260-B

Check doors and place in proper order

Check glazing of metal sash in monitors. Repair windows and paint

No work required in room # 259

Hollow metal doors, metal frames See Detail # 5

See Detail # 4

Replace roofing on porch

Replace existing glass in door with polished wire glass

See Detail # 2

See Detail # 11-B

Repair and reinstall blackout shades on door, transom and window

Remove one glass panel

See Detail # 2

Existing Automatic Glazing fire doors.

Replace existing glass in door, sidelight and transom with polished wire glass

Existing fire escape

New fire escape See Detail # 10

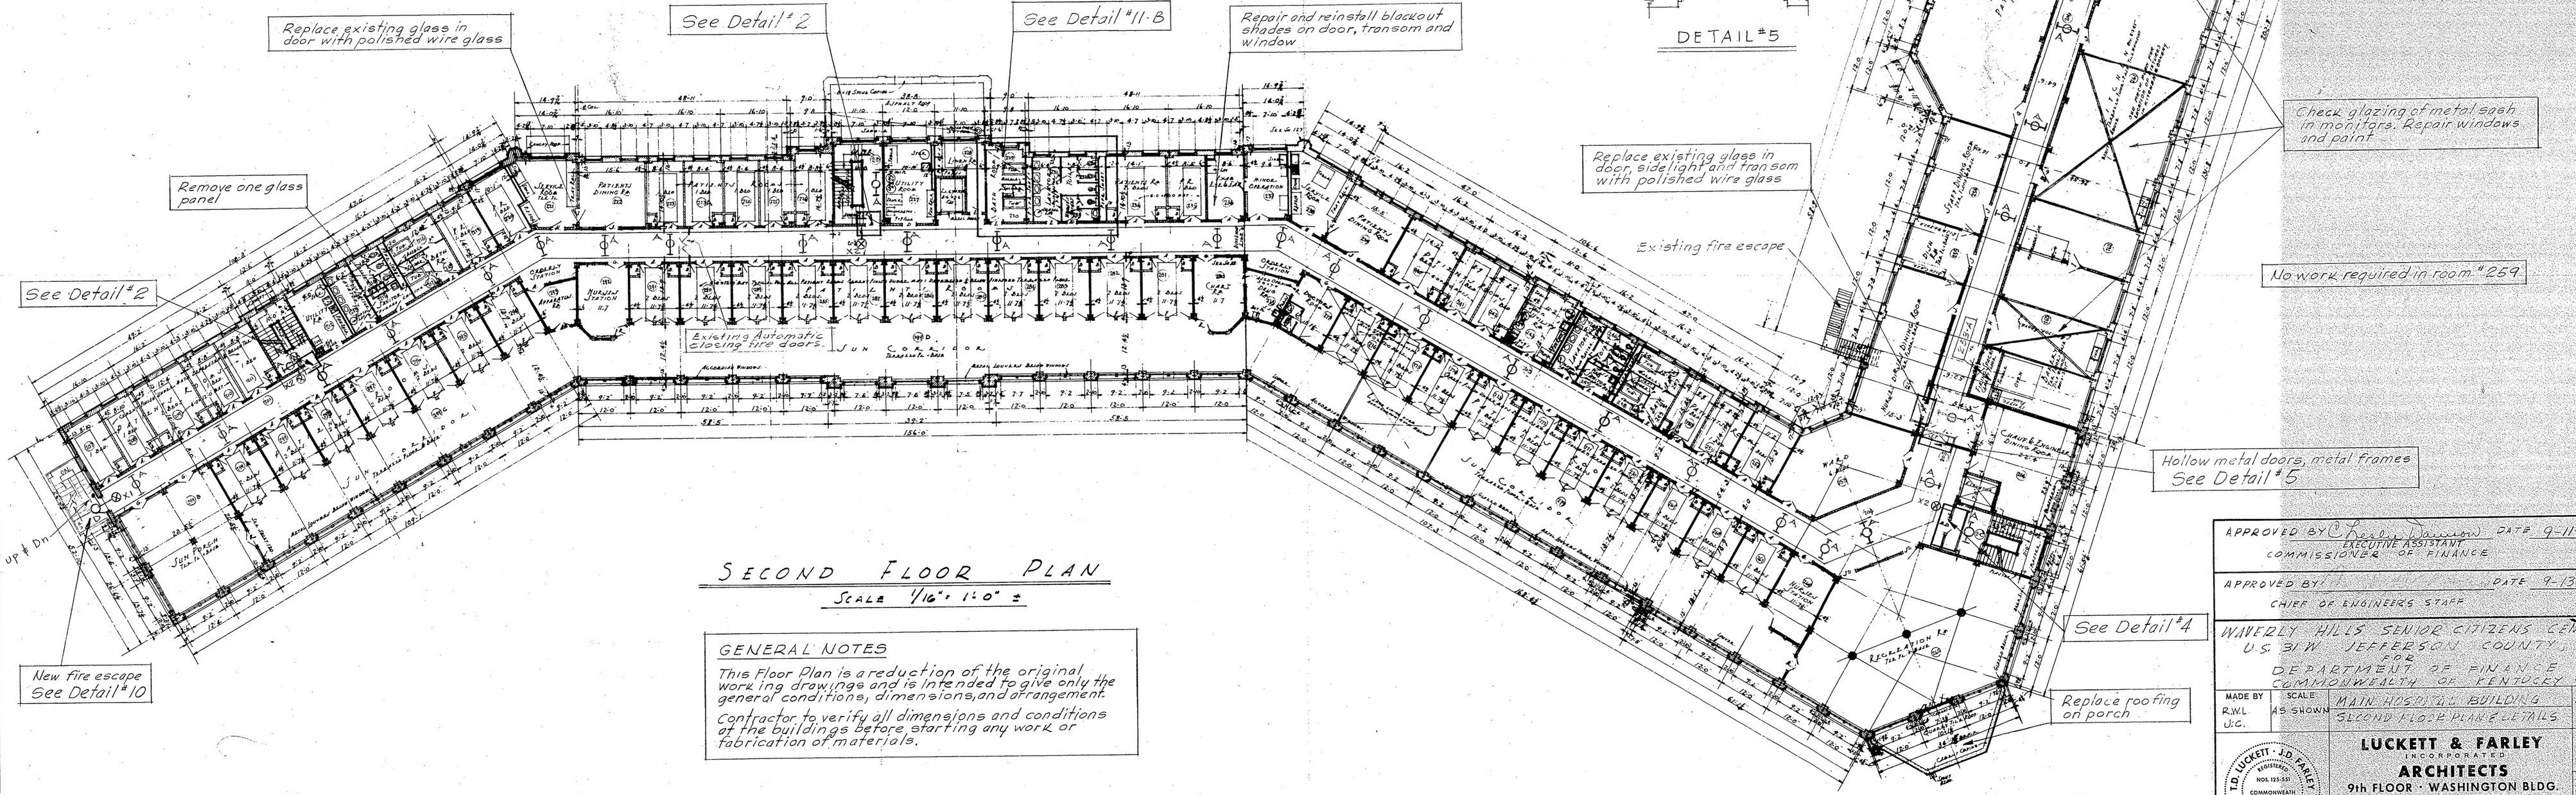

SECOND FLOOR PLAN

SCALE 1/16" = 1'-0" ±

GENERAL NOTES

This Floor Plan is a reduction of the original working drawings and is intended to give only the general conditions, dimensions, and arrangement.

Contractor to verify all dimensions and conditions of the buildings before starting any work or fabrication of materials.

APPROVED BY: [illegible] EXECUTIVE ASSISTANT COMMISSIONER OF FINANCE DATE 9-11-62

APPROVED BY: [illegible] CHIEF OF ENGINEERS STAFF DATE 9-13-62

WAVERLY HILLS SENIOR CITIZENS CENTER
U.S. 31 W JEFFERSON COUNTY, KY.
FOR
DEPARTMENT OF FINANCE
COMMONWEALTH OF KENTUCKY

MADE BY	SCALE		DATE
R.W.L. J.C.	AS SHOWN	MAIN HOSPITAL BUILDING SECOND FLOOR PLAN & DETAILS	9-11-62

REVISIONS

SHEET NO. 2

T.D. LUCKETT · J.D. FARLEY REGISTERED NOS. 133-331 COMMONWEALTH OF KENTUCKY ARCHITECTS

LUCKETT & FARLEY INCORPORATED
ARCHITECTS
9th FLOOR · WASHINGTON BLDG.
LOUISVILLE 2, KENTUCKY
E. R. RONALD & ASSOCIATES
CONSULTING ENGINEERS

AD-766